



## 82H.SR - Clés mâles métriques ADF



### Description :

- Alliage spécial Cuivre-Béryllium antidéflagrant et antimagnétique.

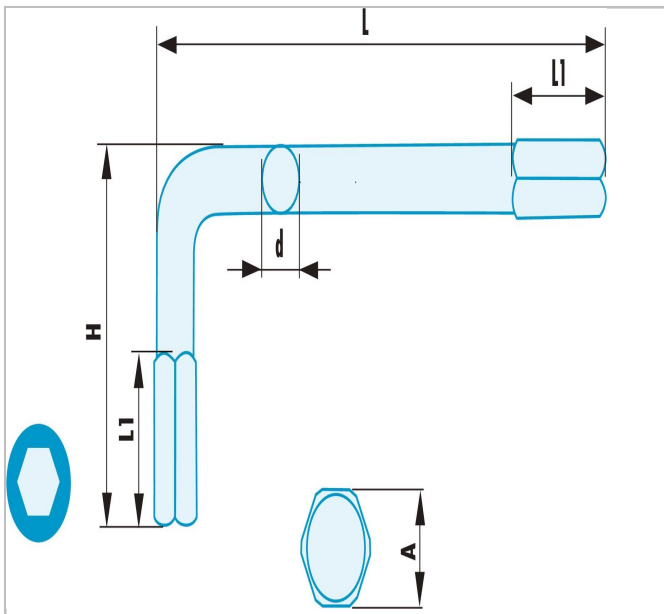

	A [mm]	Diamètre [mm]	longueur [mm]	Longueur L1 [mm]	la taille H [mm]	Poids [g]
<b>82H.1.5SR</b>	1.5	3.0	38.0	5.0	13.0	5.0
<b>82H.11SR</b>	11.0	10.0	119.0	20.0	48.0	100.0
<b>82H.12SR</b>	12.0	11.0	130.0	20.0	52.0	145.0
<b>82H.13SR</b>	13.0	11.5	140.0	20.0	54.0	180.0
<b>82H.14SR</b>	14.0	12.0	150.0	25.0	58.0	210.0
<b>82H.16SR</b>	16.0	14.0	162.0	25.0	63.0	300.0
<b>82H.17SR</b>	17.0	15.0	168.0	30.0	65.0	370.0
<b>82H.18SR</b>	18.0	16.0	173.0	30.0	69.0	450.0
<b>82H.19SR</b>	19.0	17.0	177.0	30.0	72.0	490.0
<b>82H.23SR</b>	23.0	21.0	189.0	35.0	79.0	725.0
<b>82H.24SR</b>	24.0	22.0	192.0	35.0	82.0	825.0
<b>82H.27SR</b>	27.0	25.0	213.0	35.0	93.0	1200.0
<b>82H.2SR</b>	2.0	3.0	38.0	5.0	13.0	5.0
<b>82H.32SR</b>	32.0	30.0	266.0	40.0	116.0	2000.0
<b>82H.36SR</b>	36.0	34.0	294.0	40.0	128.0	2900.0
<b>82H.3SR</b>	3.0	3.7	59.0	7.0	25.0	10.0
<b>82H.41SR</b>	41.0	39.0	320.0	40.0	140.0	4100.0
<b>82H.4SR</b>	4.0	3.8	65.0	10.0	30.0	10.0
<b>82H.5SR</b>	5.0	4.5	79.0	10.0	32.0	15.0
<b>82H.7SR</b>	7.0	6.0	88.0	20.0	43.0	35.0
<b>82H.9SR</b>	9.0	8.0	97.0	20.0	44.0	60.0